




8.

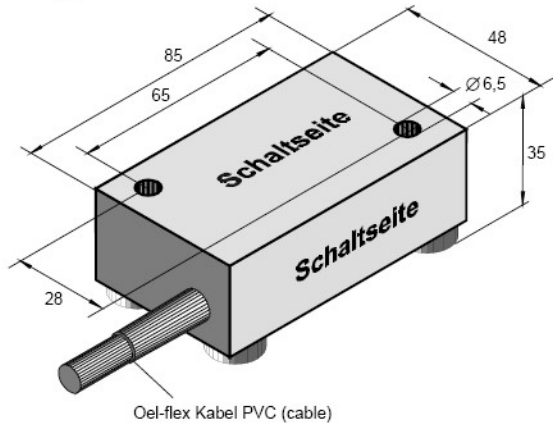

**Magnetic switch**

Type **wK178L...**

Housing: red brass  
Protections class: IP65

**Magnetic switch monostable**

Type **wK178L11\* L= 2m**

↳ 1 = 1 NO-Contact

\* Contact see Table 2 Standard: contact No. 4

**Magnetic switch bistable**


Type **wK177L23\* L= 2m** (old wHKPT2)

↳ 3 = 1 NO-Cont. and 1 NC-Cont.

\* Contact see Table 2 Standard: contact No. 4

Cable: Oelflex (PVC) oil resistant (Standard)  
Purwil UV resistant

9.

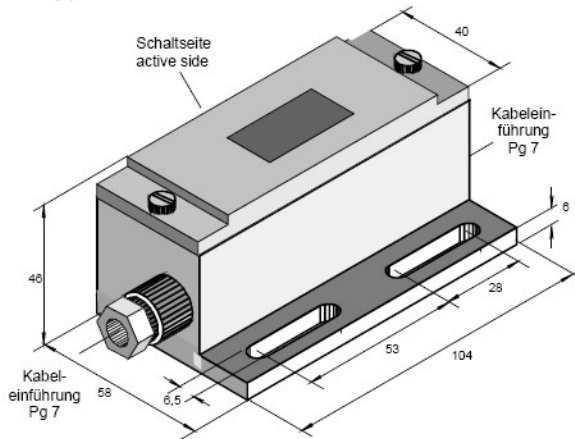

**Magnetic switch**

Type **wK008K... or wK180K...**

Housing: Silumin (alu) or red brass  
Protections class: IP54

**Magnetic switch monostable**

Type **wK008K11\*** (old BM1..)

↳ 1 = 1 NO-Contact

\* Contact see Table 2 Standard: contact No. 4


**Magnetic switch bistable**

Type **wK008K23\*** (old BM2...)

↳ 3 = 1 NO-Cont. and 1 NC-Cont.

\* Contact see Table 2 Standard: contact No. 4

10.

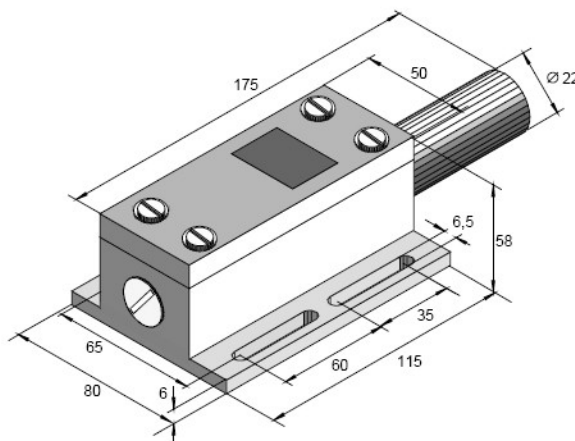

**Magnetic switch**

Type **wK167K...**

Housing: red brass  
Protections class: IP54

**Magnetic switch monostable**

Type **wK167K11\***

\* Contact see Table 2 Standard: contact No. 4

**Magnetic switch bistable**

Type **wK167K21\***

\* Contact see Table 2 Standard: contact No. 4

**Magnetic switch**

Type **wKC167K...**

**Magnetic switch monostable**

Temperature range -55° to 300° C

Type **wKC167K11\***

\* Contact see Table 2 Standard: contact No. 4

**Magnetic switch bistable**

Type **wK167K21\***

\* Contact see Table 2 Standard: contact

Subject to technical alterations

*We give impulses >>>*

**Tiefenbach Control Systems GmbH** · Rombacher Hütte 18a · 44795 Bochum  
Telephone +49 (0) 234 - 777 66-0 · Fax +49 (0) 234 - 777 66-999  
info@tiefenbach-controlsystems.com · www.tiefenbach-controlsystems.com